

Chromata Style


TECHNICAL SPECIFICATION

Manufacturing method	: Design tufted
Pile type	: Loop pile
Pile fibre	: 100% polyamide 6 piece-dyed
Gauge	: 1/10"
Pile weight	: 650 gr/m ²
Pile height	: 3.0 - 6.0 mm
Total weight	: 1700 gr/m ²
Total thickness	: 5.0 - 8.0 mm
Tuft density	: 177.200/m ²
Roll width	: 400 cm
Backing	: Actionback



PERFORMANCE

Use classification	: 23 + 33
Caster chair test	EN 985 : A, intensive use
Abrasion	EN 1963 : Pass
Vettermann test	EN 1471 : Pass
Dimensional stability	EN 986 : Pass
Thermal isolation	ISO 8302 : 0.076 m ² K/W
Sound absorption	ISO 140-8 : 26 dB
Luxery class	: LC2
DOP-nr	: 1016-3612
Prodis-nr	: C6D4E45B

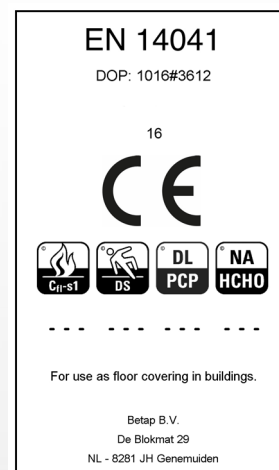

ELECTROSTATIC

Static loading	: Anti-static
Walking test	EN 1815 : ≤ 0.02 KV
Horizontal resistance	ISO 1096 5 : 6.4 x 10. ¹¹ Ohm
Vertical resistance	ISO 1096 5 : 8.8 x 10. ¹⁰ Ohm

FLAMMABILITY

Reaction to fire	EN ISO 9239-1 : Cfl-s1
Reaction to fire	BS 4790 : Medium radius of effect of ignition

COLOUR FASTNESS

Light	ISO 105 B02 : 6.0
Rubbing	ISO 105 x12 : 4.0 - 5.0
Water	ISO 105 E01 : 4.0 - 5.0



MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.