

Larix

TECHNICAL SPECIFICATION

Manufacturing method	: Level loop
Pile type	: Loop pile
Pile fibre	: 100% polyamide 6 solution-dyed
Gauge	: 5/32"
Pile weight	: 600 gr/m ²
Pile height	: 3.5 mm
Total weight	: 1550 gr/m ²
Total thickness	: 5.0mm
Tuft density	: 177.000/m ²
Roll width	: 400 cm
Backing	: Actionback



PERFORMANCE

Use classification		: 33
Caster chair test	EN 985	: A, intensive use
Abrasion	EN 1963	: Pass
Vettermann test	EN 1471	: Pass
Dimensional stability	EN 986	: Pass
Thermal isolation	ISO 8302	: 0.09 m ² K/W
Sound absorption	ISO 140-8	: 25 dB
Luxery class		: LC2
DOP-nr		: 1016-3612
Prodis-nr		: D5B5C3F9

ELECTROSTATIC


Static loading		: Anti-static
Walking test	EN 1815	: ≤ 0.01 KV
Horizontal resistance	ISO 1096 5	: 8 x 10. ⁹ Ohm
Vertical resistance	ISO 1096 5	: 4 x 10. ⁹ Ohm

FLAMMABILITY

Reaction to fire	EN ISO 9239-1	: Cfl-s1
Reaction to fire	BS 4790	: Low radius of effect of ignition

COLOUR FASTNESS

Light	ISO 105 B02	: ≥ 5.0
Rubbing	ISO 105 x12	: 4.5
Water	ISO 105 E01	: 5.0

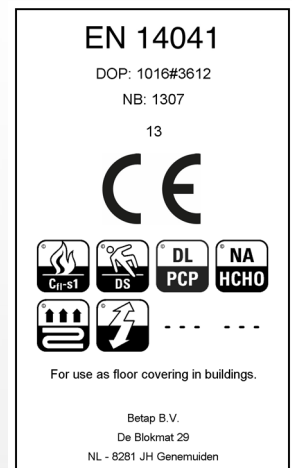

MAINTENANCE

Regular vacuum cleaning is essential. Spills and surface stains can be removed by sponging with a damp cloth, or for more resistant stains, with a mild detergent solution.