

iD Click Ultimate

55-70 & 55-70^{PLUS}

LUXURY VINYL TILES

Renovation
has never been
so swift, stylish
and robust

 **Tarkett**



EDITO

iD Click Ultimate grows stronger to take rigid surface flooring to the next level.

Now, you can combine the look, feel and strength of wood and stone with all the advantages of luxury vinyl tiles.

With iD Click Ultimate you can deliver perfect installations in a minimum time, and easily **meet the needs of all your clients**, even the most demanding ones.

With a Rigid Composite Core for **extreme resistance** to shocks and heavy loads, photo regulated PUR surface for **easy maintenance** even on **high traffic areas**, Soundblock acoustic backing for **sound absorption** up to 19 dB, an I4F® Click4U technology to simplify installation and **reduce business downtime**, plus 31 exclusive designs and 6 formats, iD Click Ultimate has it all.

CONTENTS


THE NEW VINYL TILE GENERATION: A CONCENTRATE OF TECHNOLOGY	4
WEAR, HIGH-TRAFFIC, ENVIRONMENT-PROOF	6
INSTALLATION, RENOVATION-PROOF	12
NOISE-PROOF	18
MIX WITH CARPET	24
ULTIMATE DESIGNS	28
DOING GOOD. TOGETHER.	52
COLLECTION	54
TECHNICAL SPECIFICATIONS	58

LOFT
LIGHT / MEDIUM / DARK

24742 016 / 24742 014 / 24742 015

THE NEW VINYL TILE GENERATION: A CONCENTRATE OF TECHNOLOGY

NEW!
Rigid Composite
Core Technology

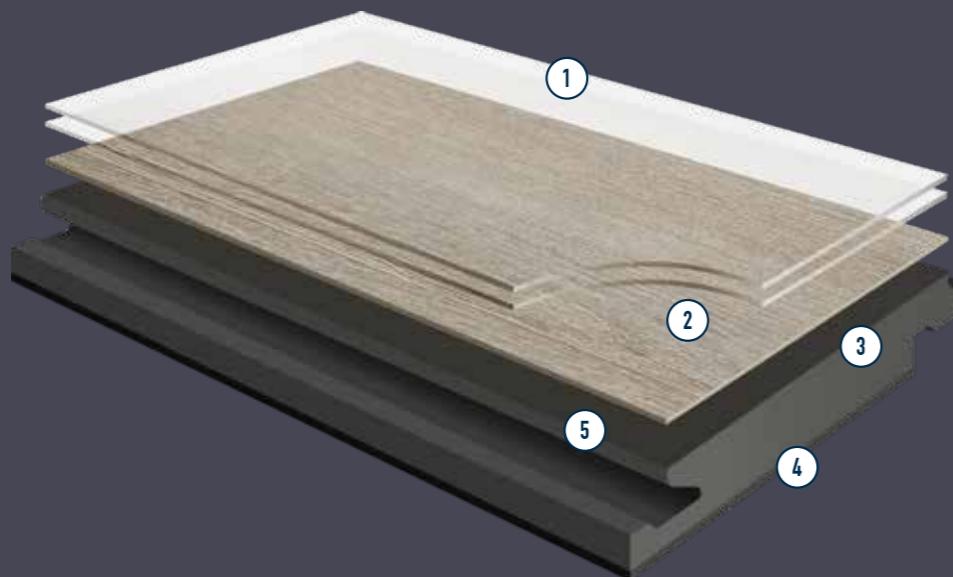

①

The **PUR Ultimate matte** surface treatment is a photo-reticulated coating that is exceptionally resistant to abrasion and scratches.

②

A **high definition** decorative layer includes lifelike embossing in register on our PLUS references.

③

Rigid Composite Core (**RCC**) technology provides extreme dimensional resistance and stability, ensuring a reliable and durable performance.

⑤

Installation is fast and easy thanks to new **I4F Click4U technology**. Simply drop, lock and click into place.

④

The acoustic backing featuring **Soundblock technology** absorbs 19dB.

iD Click's Ultimate's extra density RCC technology delivers in every dimension:



**ULTIMATE
RESISTANCE**

Wear-proof:

Ideal to cover large spaces and withstand high traffic.
RCC technology has the highest density on the market (2000Kg/m³), making it the most resistant to sustain indentation and heavy loads.

High traffic-Proof:

up to **800*** kg static
and rolling heavy loads

0,02mm
residual indentation



**ULTIMATE
ACOUSTIC COMFORT**

Noise-proof:

19 dB sound absorption
thanks to Soundblock technology.

Save money

With iD Click Ultimate integrated acoustic backing, no need for additional acoustic underlay.



**ULTIMATE
INSTALLATION**

Renovation-proof:

- Install directly over ceramic tiles and most existing subfloors
- Quick and easy installation thanks to I4F Click4U new click system
- Minimise downtime and use immediately

100 sqm installed **in 8** hours
by 1 person

No glue, no drying time

*800 kg refers to our 0.70 wear layer references.
Our 0.55 wear layer designs can bear up to 500kg static and rolling heavy loads.



Wear,
High-traffic,
environment-
proof

CONTEMPORARY OAK

CANE / BARLEY

24736 005 / 24736 004



POLISHED CONCRETE
STEEL / INDIUM

24739 012 / 24739 011

TOUGHEN UP YOUR FLOORS FOR INTENSE USE

iD Click Ultimate's **extra-dense Rigid Composite Core** sets a new product benchmark in terms of its **durability and resistance**. It withstands all scratches, scuffs, indentations and abrasions, maintains **dimensional stability** at high heat and can be installed directly over most existing subfloors.

ULTIMATE RESISTANCE



Wear-Proof:
Resistant to indentation, abrasion, scratches and scuffs

Meeting class 34-high traffic standards, large areas of iD Click Ultimate can bring extraordinary resistance to large surface areas in professional or light industrial environments that see intense use and activity, thanks to its **extra-dense Rigid Composite Core**.

Wear Resistance tests

	SCUFF RESISTANCE ¹ (1: worst to 10: no scuff)	ABRASION ² (in µm)	INDENTATION ³ (in mm)
Rigid Core iD Click Ultimate	8,7	44	0,02
Rigid Core Product A	7,3	51	0,09
Rigid Core Product B	7,3	52	0,06
Rigid Core Product C	4,7	79	0,05

1. Internal Tarkett scuff test (1: worst to 10: no scuff)

2. Internal test: microscope analysis of loss of thickness after abrasion test (in µm)

3. Indentation test (According to norm ISO 24343-1 test in mm)



High traffic-Proof:
Endures high traffic and heavy loads

Install up to **400sqm** (20x20 linear meters) without any expansion profiles.

Resistance to heavy loads: iD Click Ultimate can support static and rolling heavy loads (manual pallet lift and trolley) up to **800kg** installed on an even subfloor and is fit for deployment in light industrial area and supermarkets.

Resistance to indentation: In addition, this extremely resistant flooring provides an outstanding residual indentation behavior of **0,02mm** (according to Norm EN ISO 24343-1), which minimises the risk of indentation marks by heavy loads.

*800 kg refers to our 0.70 wear layer references.

Our 0.55 wear layer designs can bear up to 500kg static and rolling heavy loads.



ENGLISH OAK
VANILLA

24736 009



Stain-Proof: Resists stains, easy to clean

Ultimate PUR surface treatment protects the floor from stains and facilitates cleaning.

ULTIMATE THERMOSTABILITY




Environment-Proof: Withstands temperature extremes and water

Neither water, cold nor heat can alter iD Click Ultimate's appearance. It maintains excellent dimensional stability in extreme temperature variations.

From 10°C to 60°C, no deformation over time

Maximum temperature of the floor allowed after installation (°C)

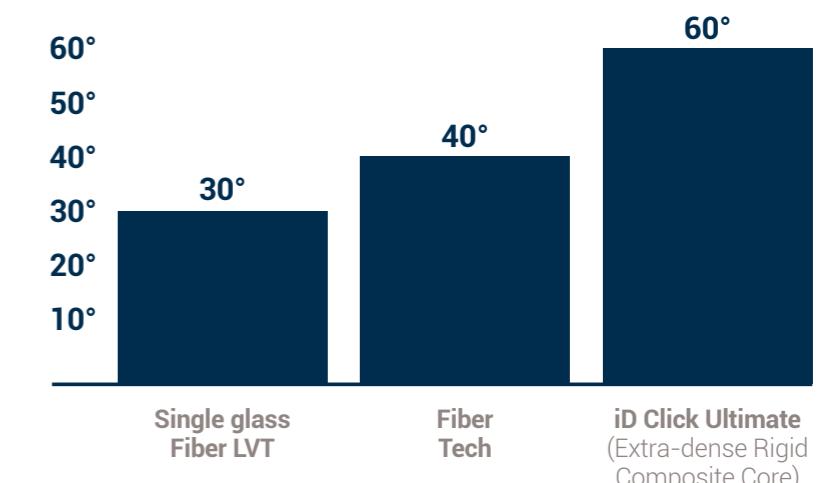



Installation,
Renovation-
proof

POLISHED CONCRETE
INDIUM / STEEL
24739 011 / 24739 012




CONTEMPORARY OAK
BARLEY

24836 004

OPEN UP YOUR SPACE FOR IMMEDIATE USE

iD Click Ultimate reduces business downtime to a strict minimum, since it requires no or little subfloor preparation*, no gluing and no waiting. Install and go!

ULTIMATE INSTALLATION



Renovation-proof:
Place directly over ceramic tiles and most existing subfloors

Little or no special subfloor treatment is required before installation and subfloor imperfections are greatly minimised thanks to the structure and design of our flooring.


Rigid Composite Core stiffness

Install on ceramics with joints up to 8mm width and 3mm depth.



Foam backing

Our iD Click Ultimate tiles have a foam backing that covers subfloor imperfections. For a perfectly even floor.*

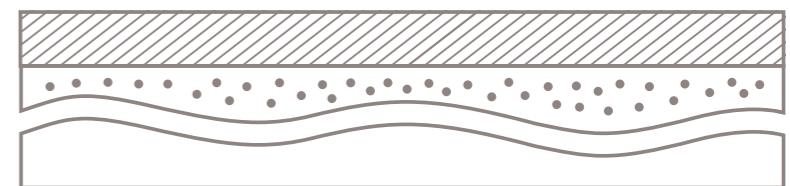

* Each project is unique, check our installation notice for more details.



ENGLISH OAK
HONEY
24736 010




**Click it quick
and easy**

For iD Click Ultimate, Tarkett has integrated the **I4F Click4U** locking system, which combines an angle-system for the long side of the planks and a 3L TripleLock on the short side. 3L TripleLock is a unique one piece drop-lock system that eliminates the need for additional plastic inserts making it up to **30% faster** to install than a traditional angle-angle click system. It provides a high locking strength and minimises squeaking, delivering one of the easiest and fastest click systems on the market.

Up to 30%
faster than a traditional angle-angle
click system

100 sqm of flooring installed in **8** hours by 1 person



Install and walk

Everything about iD Click Ultimate makes it fast to install and ready for immediate use.

No glue, no drying time

Up to 400 sqm with no expansion profiles
(Rooms of 20x20m)



Noise-proof

SCANDINAVIAN OAK
GREY
24833 000



SOAK UP NOISE THROUGH THE FLOOR


iD Click Ultimate's acoustic backing has Soundblock Technology integrated, creating more peaceful interior environments everywhere, from hotel rooms to offices.

ULTIMATE COMFORT




Noise-proof: Decrease in-room sound

The exclusive structure of iD Click Ultimate ensures the lowest in-room walking noise compared to any other hard floor solution.

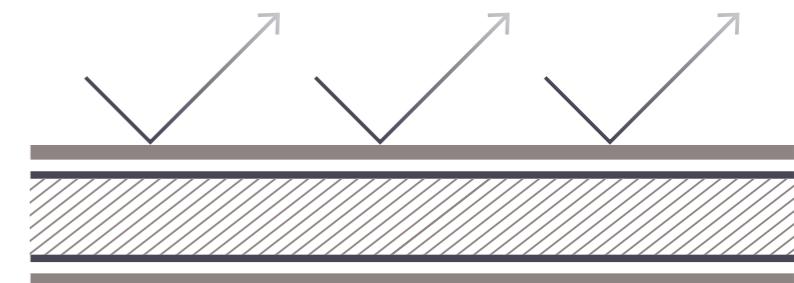

In-room walking noise (dB)

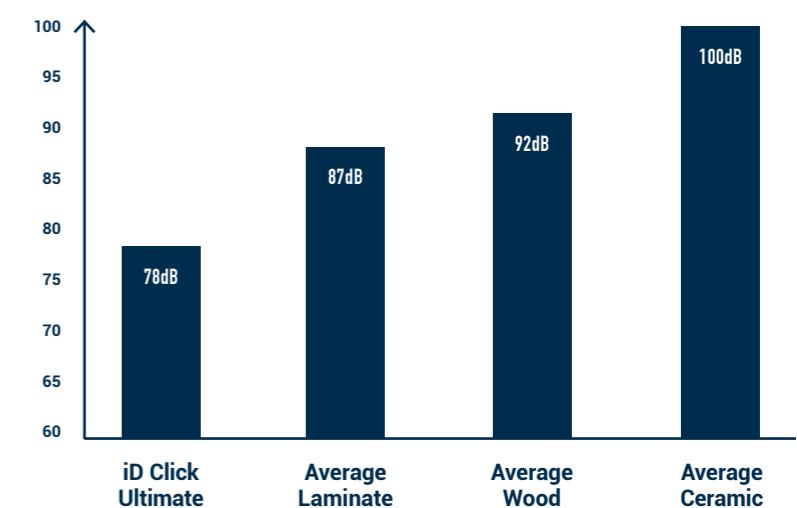

Save money

With iD Click Ultimate integrated acoustic backing, no need for additional acoustic underlay.

POLISHED CONCRETE
INDIUM / STEEL
24739 011 / 24739 012




RIVIERA OAK
LIGHT BROWN

24797 017



Dampen the noise

Reduce sound transmission between floors to 19dB.

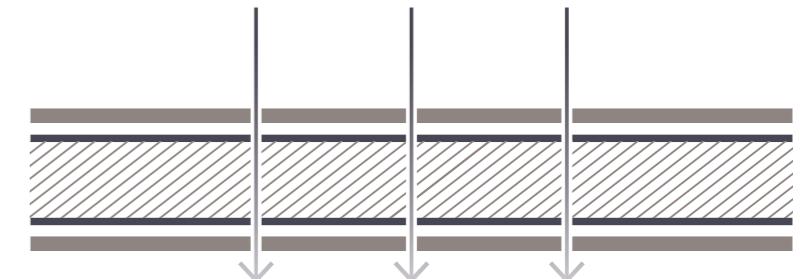

Dampen noise levels in rooms and between floors





Mix with
carpet

POLISHED CONCRETE
STEEL
24739 012

DESSO&EX
4311-640



MIX WITH CARPET FOR CAPTIVATING INTERIORS

iD Click Ultimate flooring and DESSO carpet tile products are simply the perfect fit. The slight difference in height between both floors (maximum 2,5mm*) allows for a smooth transition.



*We advise keeping a height difference of maximum 2.5 mm between Carpet tiles and LVT.

COPPER OAK
NATURAL
24733 006

DESSO
GRANITE
8222



Ultimate
designs

POLISHED CONCRETE
INDIUM / STEEL

24739 011 / 24739 012



CONTEMPORARY OAK
CANE / BARLEY
24736 005 / 24736 004

CONTEMPORARY OAK

The diversified movement, shading and texture reflect the faceted landscape of the spanish "Valle de Ordesa". The stone-like but warm colorations give the design a Mediterranean attitude.



CANE
70: 24736 005
55: 24836 005



BARLEY
70: 24736 004
55: 24836 004



MALT
70: 24736 003
55: 24836 003



ENGLISH OAK
VANILLA / HONEY
24836 009 / 24836 010

ENGLISH OAK

This oak embodies British charm. The natural, generous movement and gallant colours are inspired by the quirky mix of its rural landscape and sophisticated cities.



VANILLA
70: 24736 009
55: 24836 009



HONEY
70: 24736 010
55: 24836 010



HAZEL
70: 24736 008
55: 24836 008



SCANDINAVIAN OAK
BEIGE
24833 002

SCANDINAVIAN OAK

Inspired by Scandinavian lifestyle and design expertise, the soft colours of this design are conferring an elegant and natural look.



GREY
70: 24733 000
55: 24833 000



BEIGE
70: 24733 002
55: 24833 002



BROWN
70: 24733 001
55: 24833 001



COPPER OAK

Inspired by the lively cultural mix of technology and history, Copper Oak combines rustic charm with modern natural colourations.



LIGHT
70: 24733 007
55: 24833 007



NATURAL
70: 24733 006
55: 24833 006

COPPER OAK
NATURAL
24733 006

DESSO
GRANITE
8222



POLISHED CONCRETE
STEEL
24739 012

DESSO&EX
4311-640

POLISHED CONCRETE

Inspired by Oslo's avant-garde architecture: modern and multifaceted! This lean design creates space for exploring new shapes and textures.



INDIUM
70: 24739 011
55: 24839 011



STEEL
70: 24739 012
55: 24839 012



GRAPHITE
70: 24739 013
55: 24839 013



LOFT
LIGHT
24842 016

LOFT

This design pays homage to the vibrant culture of Berlin and its lively street art scene in a fashionable way.




LIGHT
70: 24742 016
55: 24842 016



MEDIUM
70: 24742 014
55: 24842 014



DARK
70: 24742 015
55: 24842 015

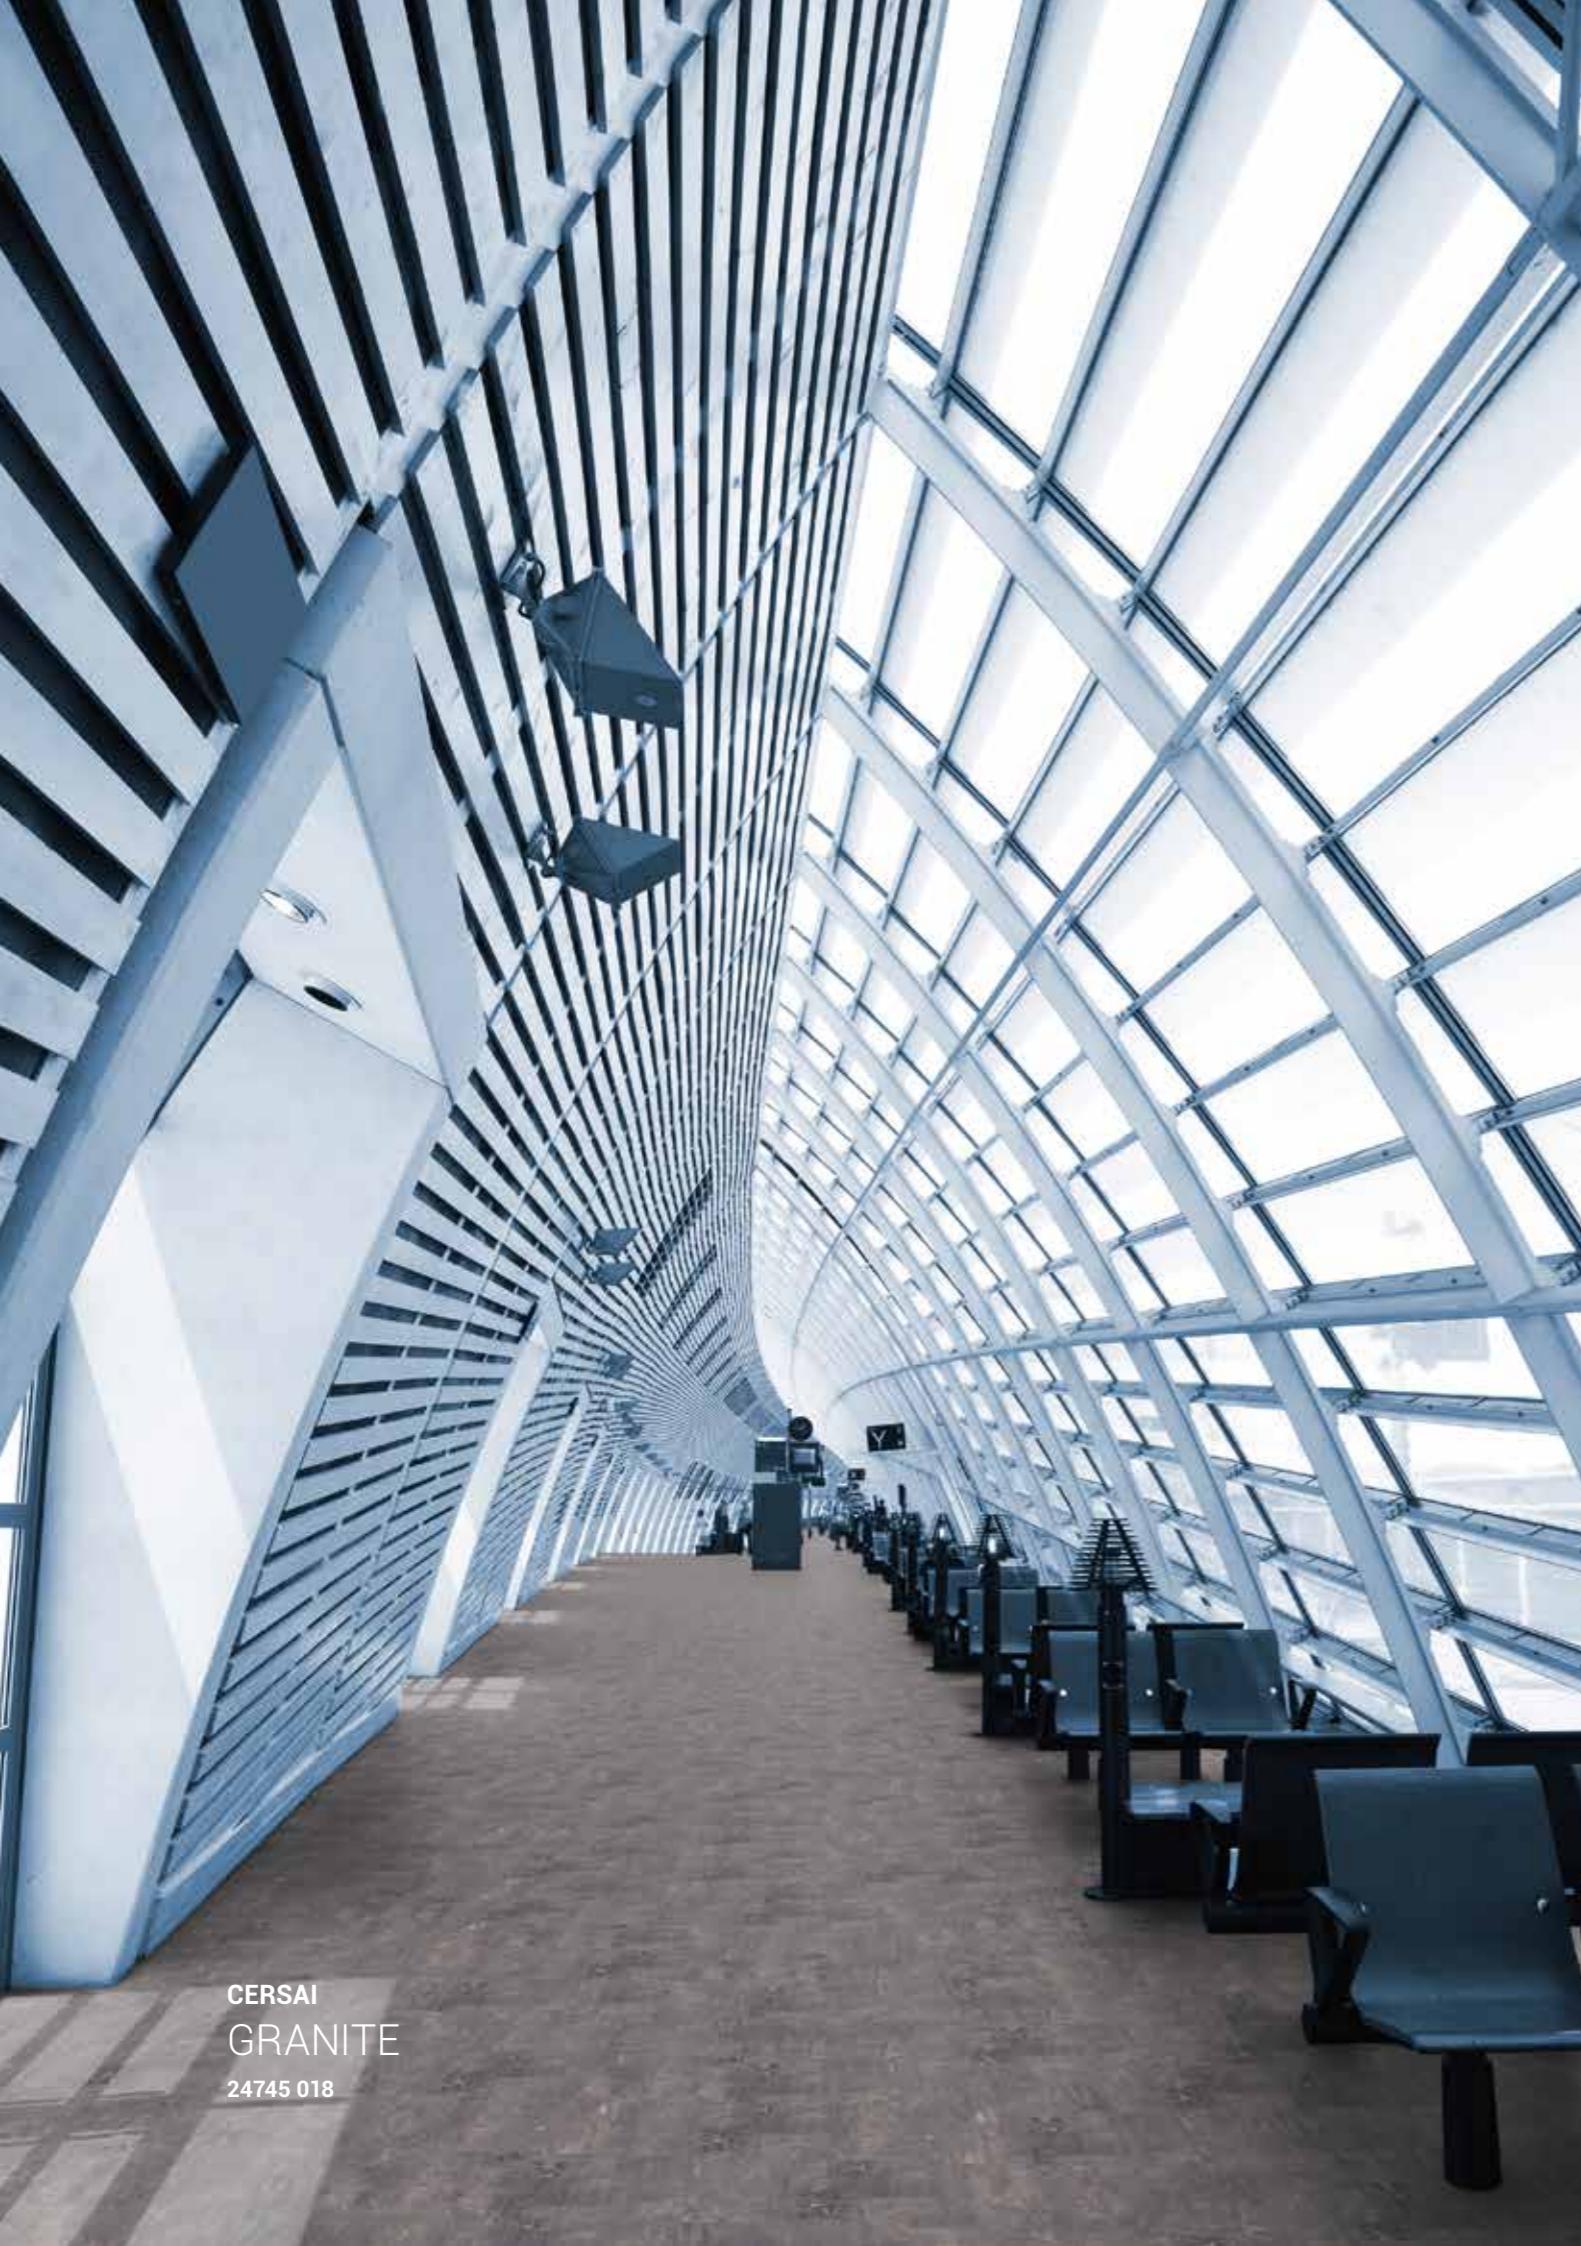

CERSAI
GRANITE
24745 018

CERSAI


This design symbolises a vintage and colourful Parisian ambience with an haute couture touch.



CLAY
70: 24745 017
55: 24845 017



GRANITE
70: 24745 018
55: 24845 018

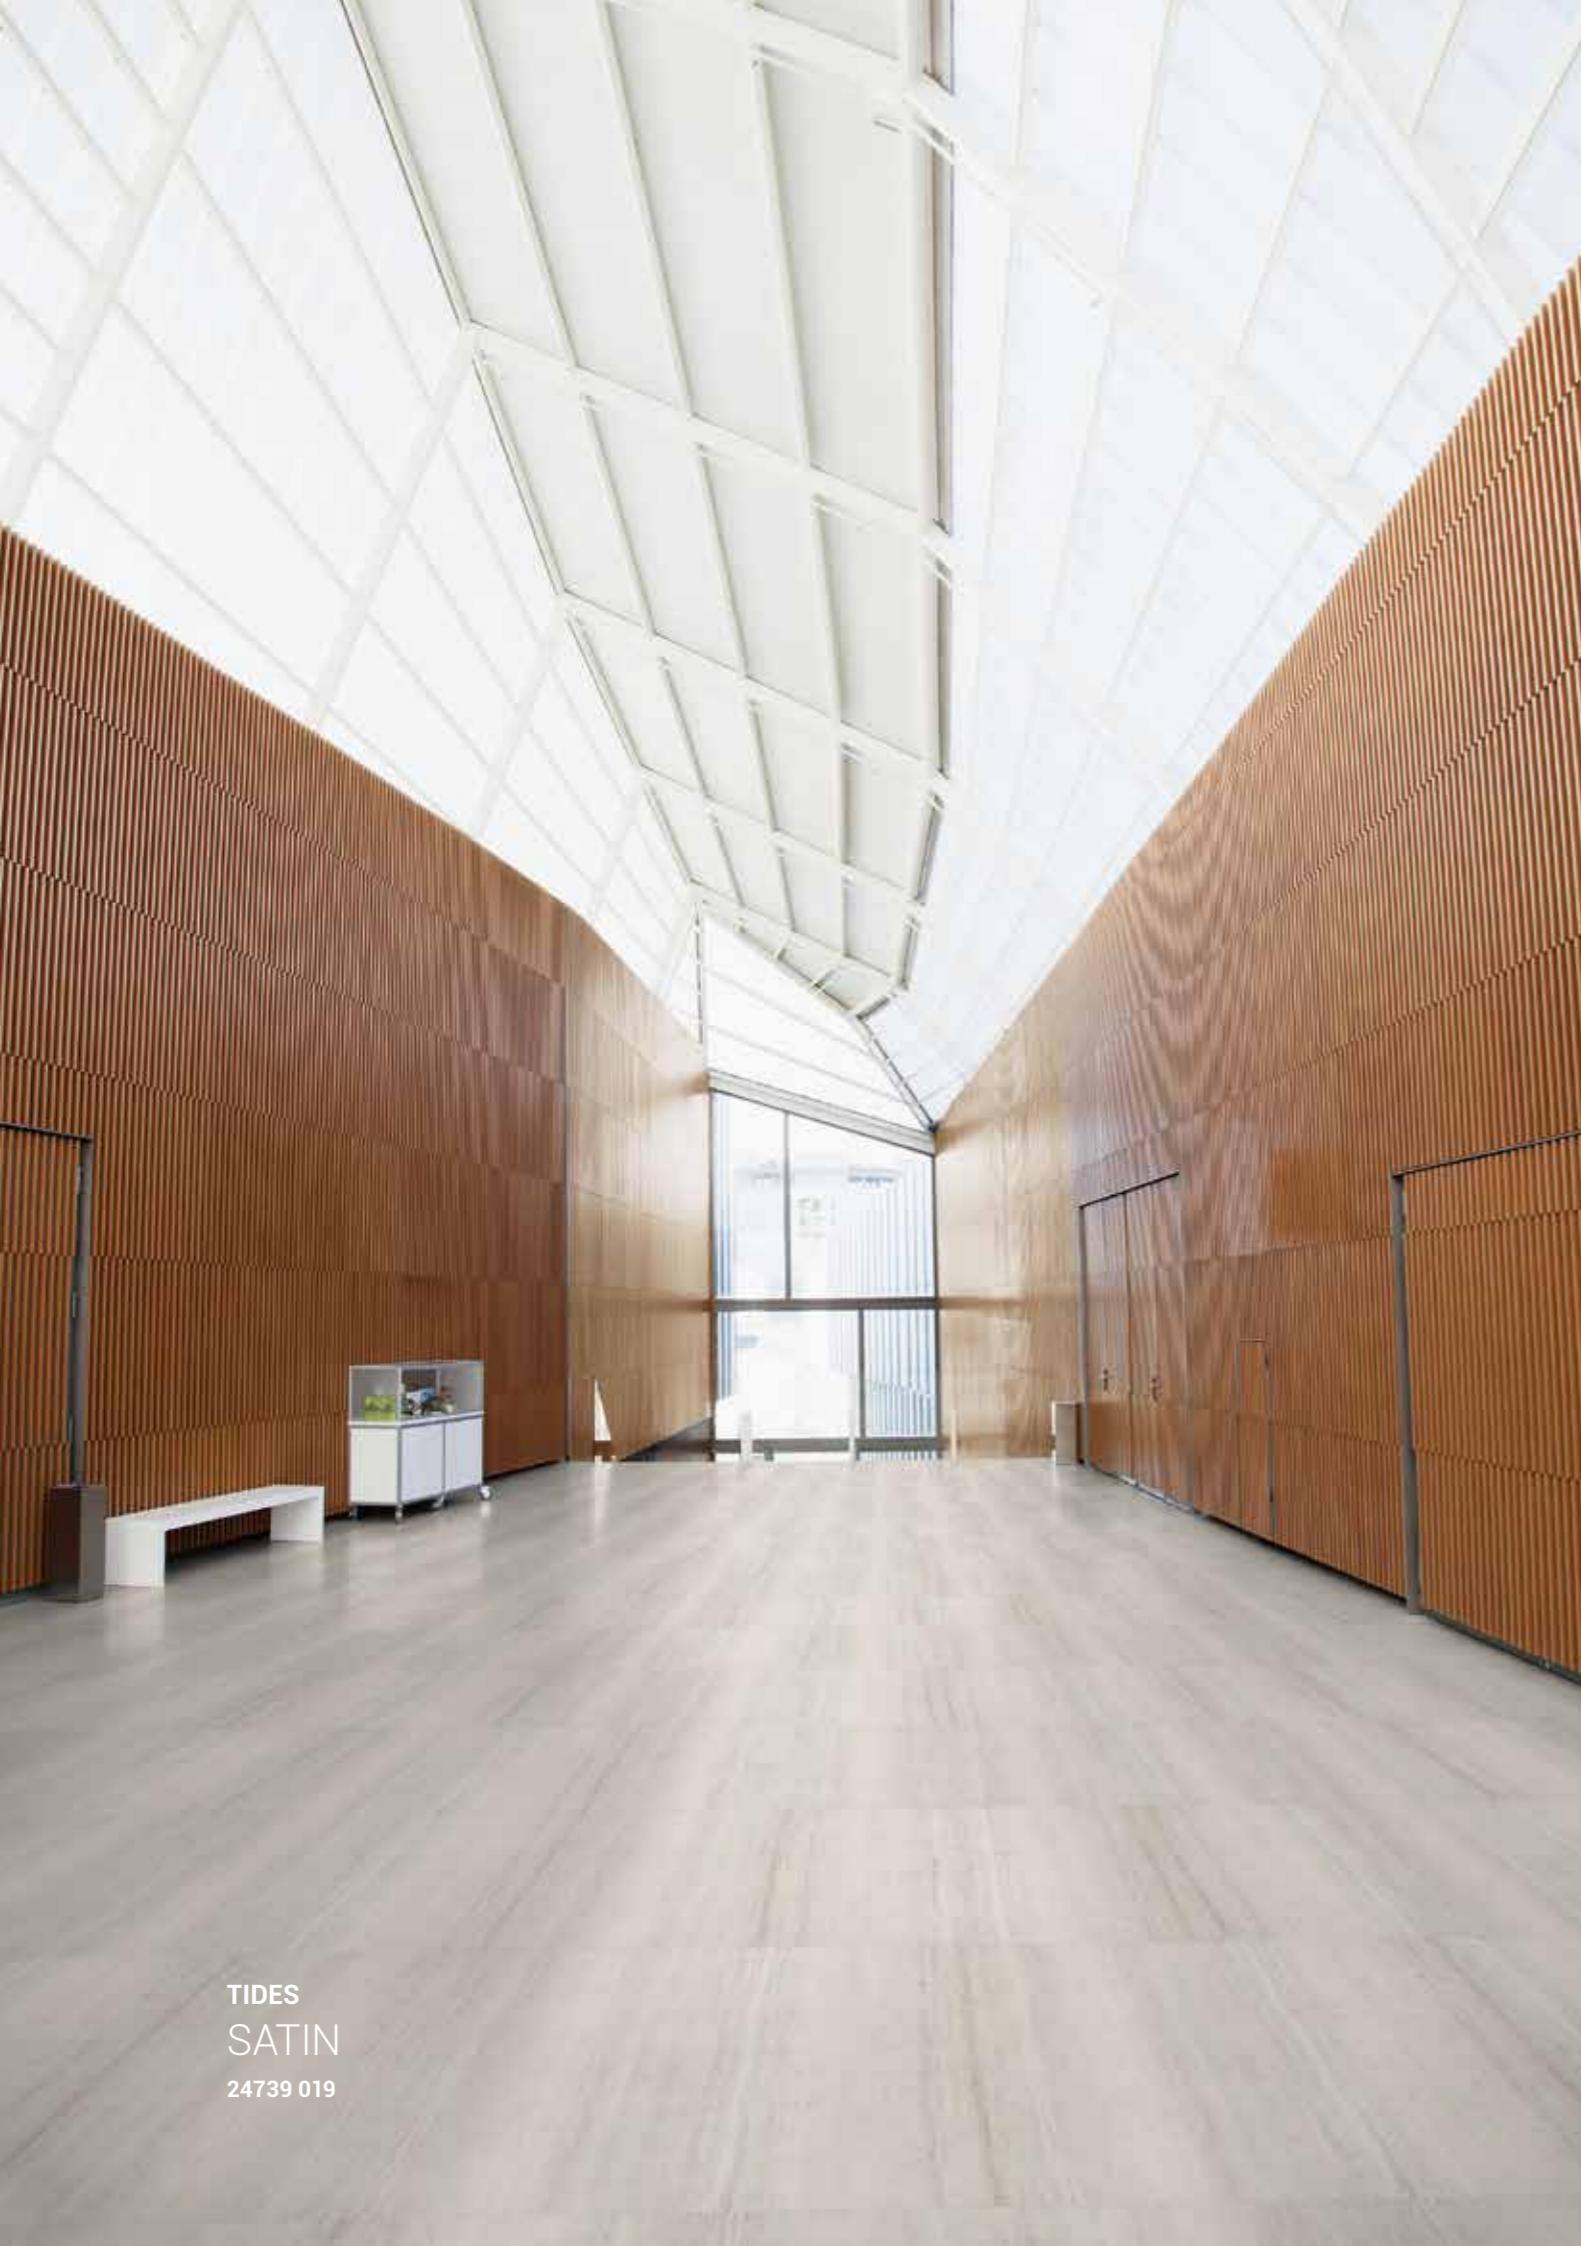

TIDES
SATIN
24739 019

TIDES

Inspired by the Scala dei Turchi. The design interprets the natural, linear structure and shading of this limestone cliff formed by the tides.



SATIN
70: 24739 019
55: 24839 019



CHARCOAL
70: 24739 020
55: 24839 020



LIGHT OAK

BROWN

24775 012

LIGHT OAK



10 designs feature Tarkett's Plus Effect technology, where our Embossed In Register (EIR) treatment realistically reproduces the natural grain of wood on every plank.

Calm but rustic thanks to the colour play inside the planks. The exciting gradient from light to dark shades is designed to match different materials inside your ambience. This is a good fit everywhere.



LIGHT GREY
70: 24775 013
55: 24797 013



BROWN
70: 24775 012
55: 24797 012



WARM BROWN
70: 24775 014
55: 24797 014



RIVIERA OAK
LIGHT BROWN

24775 017

RIVIERA OAK



The rustic appearance of this design is underlined by the play of colours from plank to plank. Perfect flooring for spaces with retro furniture and natural materials.



GREY
70: 24775 015
55: 24797 015



LIGHT BROWN
70: 24775 017
55: 24797 017



WARM BROWN
70: 24775 016
55: 24797 016



STYLISH OAK

NATURAL / GREY

24775 000 / 24775 001

STYLISH OAK



A classic and elegant oak with a natural colour play which will show some linear structures when installed. This Oak is a perfect companion to go with bold and rich colours.



WHITE
70: 24775 003
55: 24797 003



BEIGE
70: 24775 002
55: 24797 002



NATURAL
70: 24775 000
55: 24797 000



GREY
70: 24775 001
55: 24797 001



Doing Good. Together.

At Tarkett, we strive to support both our professional clients and consumers in creating healthy, beautiful and sustainable living spaces. Working with industry partners, we're bringing our best thinking and efforts toward making a positive impact on people and the planet.



We are designing for life

We design our flooring solutions for life, thereby contributing to people's well-being and good health as well as preserving natural resources. Through low levels of total volatile organic compounds (TVOCs) – TVOCs $\leq 100 \text{ } \mu\text{g}/\text{m}^3$, compliant to EU standard EN-ISO 16000, iD Click Ultimate contributes to good indoor air quality and is 100% phthalate free for a healthier indoor environment. Through our focus on Cradle to Cradle® design, we make our products in a way that helps to preserve natural resources and mitigate climate change.



We are closing the loop

We recycle waste from our production, transforming it into new, high quality products. In this way, we can contribute to safeguarding the world's natural resources and protecting the environment, and by closing the loop, shift to a circular economy.



We're driving collaboration

The world's great sustainability challenges require co-operation and partnership across industries and supply chains. We encourage our customers and all our stakeholders to join us in working toward positive change. Importantly, we communicate our sustainability progress transparently, and provide you with clear information about our products and ambitions.

Doing Good. Together.

Every day, we strive to improve people's lives, preserve natural resources and respect our environment.

iD CLICK ULTIMATE 55/70 COLLECTION

CONTEMPORARY OAK

24.30 x 150.00 cm



CANE
70: 24736 005 55: 24836 005



BARLEY
70: 24736 004 55: 24836 004



MALT
70: 24736 003 55: 24836 003

ENGLISH OAK

24.30 x 150.00 cm



VANILLA
70: 24736 009 55: 24836 009



HONEY
70: 24736 010 55: 24836 010



HAZEL
70: 24736 008 55: 24836 008

SCANDINAVIAN OAK

20.05 x 120.00 cm



GREY
70: 24733 000 55: 24833 000



BEIGE
70: 24733 002 55: 24833 002




BROWN
70: 24733 001 55: 24833 001

COPPER OAK

20.05 x 120.00 cm



LIGHT
70: 24733 007 55: 24833 007



NATURAL
70: 24733 006 55: 24833 006

POLISHED CONCRETE


48.00 x 96.00 cm



INDIUM
70: 24739 011 55: 24839 011



STEEL
70: 24739 012 55: 24839 012



GRAPHITE
70: 24739013 55: 24839013

LOFT

48.00 x 48.00 cm



LIGHT
70: 24742 016 55: 24842 016



MEDIUM
70: 24742 014 55: 24842 014



DARK
70: 24742 015 55: 24842 015

CERSAI

24.30 x 48.60 cm




CLAY
70: 24745 017 55: 24845 017



GRANITE
70: 24745 018 55: 24845 018

TIDES

48.00 x 96.00 cm



SATIN
70: 24739 019 55: 24839 019



CHARCOAL
70: 24739 020 55: 24839 020

iD CLICK ULTIMATE 55/70

INDUSTRIAL CLASS COLLECTION

21 designs are available on demand with the industrial classification 42/43.

These references are designed without acoustic backing.
Please see page 61 for product details.



CONTEMPORARY OAK
24.30 x 150.00 cm



CANE
70: 24851 005 55: 24866 005



BARLEY
70: 24851 004 55: 24866 004



MALT
70: 24851 003 55: 24866 003

ENGLISH OAK
24.30 x 150.00 cm



VANILLA
70: 24851 009 55: 24866 009



HONEY
70: 24851 010 55: 24866 010



HAZEL
70: 24851 008 55: 24866 008

SCANDINAVIAN OAK
20.05 x 120.00 cm



GREY
70: 24848 000 55: 24863 000



BEIGE
70: 24848 002 55: 24863 002




BROWN
70: 24848 001 55: 24863 001

COPPER OAK
20.05 x 120.00 cm



LIGHT
70: 24848 007 55: 24863 007




NATURAL
70: 24848 006 55: 24863 006

POLISHED CONCRETE
48.00 x 96.00 cm



INDIUM
70: 24854 011 55: 24869 011



STEEL
70: 24854 012 55: 24869 012



GRAPHITE
70: 24854 013 55: 24869 013

LOFT
48.00 x 48.00 cm



LIGHT
70: 24857 016 55: 24872 016



MEDIUM
70: 24857 014 55: 24872 014



DARK
70: 24857 015 55: 24872 015

CERSAI
24.30 x 48.60 cm




CLAY
70: 24860 017 55: 24875 017



GRANITE
70: 24860 018 55: 24875 018

TIDES
48.00 x 96.00 cm



SATIN
70: 24854 019 55: 24869 019



CHARCOAL
70: 24854 020 55: 24869 020

iD CLICK ULTIMATE 55/70^{PLUS} COLLECTION



LIGHT OAK
17.6 x 121.3 cm



LIGHT GREY
70: 24775 013 55: 24797 013



BROWN
70: 24775 012 55: 24797 012



WARM BROWN
70: 24775 014 55: 24797 014

RIVIERA OAK
17.6 x 121.3 cm



GREY
70: 24775 015 55: 24797 015



LIGHT BROWN
70: 24775 017 55: 24797 017



WARM BROWN
70: 24775 016 55: 24797 016

STYLISH OAK
17.6 x 121.3 cm



WHITE
70: 24775 003 55: 24797 003



BEIGE
70: 24775 002 55: 24797 002



NATURAL
70: 24775 000 55: 24797 000



GREY
70: 24775 001 55: 24797 001

FORMATS 55/70



24.30 x 150.00 cm



20.05 x 120.00 cm




48.00 x 96.00 cm



17.6 x 121.3 cm



24.30 x 48.60 cm

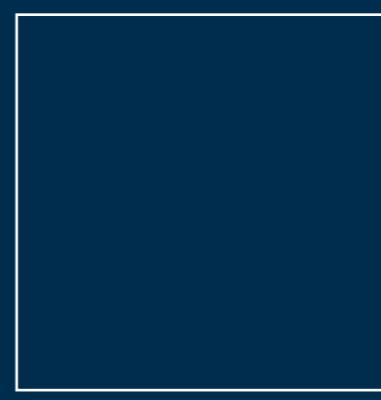


48.00 x 48.00 cm

ACCESSORIES FOR AN ULTIMATE FINISH

iD Click Ultimate comes with a full range of coordinated skirting and additional accessories. Please liaise with your local Tarkett representative for more information.

SKIRTING

PVC Decorative SKIRTING




PVC Decorative Skirting
With PUR surface treatment.

With decorative film matching collection designs (8 cm)

Packaging:
2,02 lm skirtings in packs of 10

Decorative set-on skirtings




PVC semi-rigid skirting for decorative use
with upper and lower soft lips.

White (8cm) 1411 257

Packaging:
2.5 lm skirtings in packs of 20

PROFILE

Transition profile



Aluminium profile, to be screwed.

Silver (1451 011)
Stainless Steel (1451 012)

Packaging:
2.7 lm profiles in packs of 10

PRODUCT DETAILS

Design	Colour	Dimensions (cm)	References 55	Reference 55 without acoustic backing*	References 70	Reference 70 without acoustic backing*	Embossing	Matching skirting SAP	LRV
iD Click Ultimate 55-70									
CERSAI	Clay	24.30 x 48.60	24845017	24875017	24745017	24860017	Rough Concrete	35949050	18,68
	Granite		24845018	24875018	24745018	24860018	Rough Concrete	35949051	18,73
CONTEMPORARY OAK	Malt	24.30 x 150.00	24836003	24866003	24736003	24851003	Classic Oak	35949036	21,71
	Barley		24836004	24866004	24736004	24851004	Classic Oak	35949037	27,57
COPPER OAK	Cane	20.05 x 120.00	24836005	24866005	24736005	24851005	Classic Oak	35949038	33,89
	Natural		24833006	24863006	24733006	24848006	Classic Oak	35949039	25,56
ENGLISH OAK	Light	20.05 x 120.00	24833007	24863007	24733007	24848007	Classic Oak	35949040	41,89
	Hazel		24836008	24866008	24736008	24851008	Classic Oak	35949041	15,12
LOFT	Vanilla	24.30 x 150.00	24836009	24866009	24736009	24851009	Classic Oak	35949042	47,22
	Honey		24836010	24866010	24736010	24851010	Classic Oak	35949043	33,76
POLISHED CONCRETE	Medium	48.00 x 48.00	24842014	24872014	24742014	24857014	Rough Concrete	35949047	24,73
	Dark		24842015	24872015	24742015	24857015	Rough Concrete	35949048	18,23
SCANDINAVIAN OAK	Light	48.00 x 96.00	24842016	24872016	24742016	24857016	Rough Concrete	35949049	45,41
	Indium		24839011	24869011	24739011	24854011	Rough Concrete	35949044	32,64
TIDES	Steel	48.00 x 96.00	24839012	24869012	24739012	24854012	Rough Concrete	35949045	25,07
	Graphite		24839013	24869013	24739013	24854013	Rough Concrete	35949046	6,95
TIDES	Grey	20.05 x 120.00	24833000	24863000	24733000	24848000	Classic Oak	35949033	44,89
	Brown		24833001	24863001	24733001	24848001	Classic Oak	35949034	21,57
TIDES	Beige	48.00 x 96.00	24833002	24863002	24733002	24848002	Classic Oak	35949035	37,08
	Satin		24839019	24869019	24739019	24854019	Rough Concrete	35949052	55,82
TIDES	Charcoal		24839020	24869020	24739020	24854020	Rough Concrete	35949053	8,43
iD Click Ultimate 55-70^{PLUS}									
LIGHT OAK	Brown	17.6 x 121.3	24797012	-	24775012	-	EIR	35949022	26,35
	Light Grey		24797013	-	24775013	-	EIR	35949023	35,2
	Warm Brown		24797014	-	24775014	-	EIR	35949024	18,22
RIVIERA OAK	Grey	17.6 x 121.3	24797015	-	24775015	-	EIR	35949025	21,34
	Warm Brown		24797016	-	24775016	-	EIR	35949026	15,62
	Light Brown		24797017	-	24775017	-	EIR	35949027	23,61
STYLISH OAK	Natural	17.6 x 121.3	24797000	-	24775000	-	EIR	35949018	41,17
	Grey		24797001	-	24775001	-	EIR	35949019	34,1
	Beige		24797002	-	24775002	-	EIR	35949020	42,24
	White		24797003	-	24775003	-	EIR	35949021	48,98

* Product available on MTO (Make to order) with no minimum order quantity.

TENDER DATASHEET

TECHNICAL DATASHEET

iD Click Ultimate 55-70

The selected flooring similar to iD Click Ultimate belongs to the compact vinyl floors category with a Rigid Composite Core layer manufactured through extrusion process and a density of 2000kg/m³.

It also contains an integrated acoustic backing of 19db.

It is available in planks (17.60x121.30 cm; 20.05x120.00 cm, 24.30x150.00 cm) and tiles (24.30x48.60 cm; 48.00x48.00 cm; 48.00x96.00 cm) formats

The product is available with a wear-layer of 0,70mm (iD Click Ultimate 70) and a wear-layer of 0,55mm (iD Click Ultimate 55). The wear layer is reinforced with a PU treatment, which permanently suppresses any wax and regenerating polish spray maintenance operations.

It has a static indentation resistance ≤ 0,02mm and a dimensional stability ≤ 0,05% according to EN ISO 23 999.

iD Click Ultimate can sustain heavy static and rolling loads up to 800 kg (iD Click Ultimate 70) or 500Kg (iD Click Ultimate 55).

Its emission rate of volatile organic compounds in air is less than 100 µg / m³ (COVT after 28 days).

iD Click Ultimate comes with a 10 Year warranty.

CLASSIFICATION	Standards	iD Click Ultimate 70	iD Click Ultimate 55	iD Click Ultimate 70 ^{PLUS}	iD Click Ultimate 55 ^{PLUS}
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	23 - 34 - 43*	23 - 33 - 42*	23 - 34	23 - 33
TECHNICAL CHARACTERISTICS					
Total thickness	EN ISO 24346	6,50 mm	6,50 mm	6,50 mm	6,50 mm
Wear layer thickness	EN ISO 24340	0,70 mm	0,55 mm	0,70 mm	0,55 mm
Total weight	EN ISO 23997	11,30 kg/m ²	11,40 kg/m ²	11,30 kg/m ²	11,40 kg/m ²
Wear layer binder content	EN ISO 10582	Type I	Type I	Type I	Type I
Dimensions	EN ISO 24342 Planks	- 20.05 x 120.00 cm, 5 planks/box = 1,20 m ²	- 24.30x150.00 cm, 3 planks/box = 1,09 m ²	17.6 x 121.3 cm, 6 planks/box = 1,28 m ²	17.6 x 121.3 cm, 6 planks/box = 1,28 m ²
				- 20.05 x 120.00 cm, 5 planks/box = 1,20 m ²	-
				- 24.30x150.00 cm, 3 planks/box = 1,09 m ²	-
	EN ISO 24342 Tiles	48.00 x 96.00 cm, 3 tiles/box = 1,38 m ²	48.00 x 96.00 cm, 3 tiles/box = 1,38 m ²	- 48.00 x 48.00 cm, 5 tiles/box = 1,15 m ²	- 48.00 x 48.00 cm, 5 tiles/box = 1,15 m ²
				- 24.30 x 48.60 cm, 11 tiles/box = 1,30 m ²	- 24.30 x 48.60 cm, 11 tiles/box = 1,30 m ²
				- 11 tiles/box = 1,30 m ²	- 11 tiles/box = 1,30 m ²
Surface treatment (PUR)		Yes - PUR Ultimate matte	Yes - PUR Ultimate matte	Yes - PUR Ultimate matte	Yes - PUR Ultimate matte
Beveled edges		Yes	Yes	Yes	Yes
Embossing in Register		No	No	Yes on PLUS references	Yes on PLUS references
TECHNICAL PERFORMANCES					
Dimensional stability	EN ISO 23999	Average measured value: 0,05% Required value: ≤ 0,15%	Average measured value: 0,05% Required value: ≤ 0,15%	Average measured value: 0,05% Required value: ≤ 0,15%	Average measured value: 0,05% Required value: ≤ 0,15%
Curl resultant to heat	EN ISO 23999	≤ 1 mm	≤ 1 mm	≤ 1 mm	≤ 1 mm
Reaction to fire	EN 13501-1	B _r -s1	B _r -s1	B _r -s1	B _r -s1
Residual indentation	EN ISO 24343-1	Average measured value: 0,02 mm Required value: ≤ 0,10 mm	Average measured value: 0,02 mm Required value: ≤ 0,10 mm	Average measured value: 0,02 mm Required value: ≤ 0,10 mm	Average measured value: 0,02 mm Required value: ≤ 0,10 mm
Furniture leg	EN 424	No damage	No damage	No damage	No damage
Castor chair	ISO 4918 - EN 425	No damage	No damage	No damage	No damage
Impact sound reduction	NF EN ISO 717 / 2	ΔLw 19 dB / ΔLin 7 dB	ΔLw 19 dB / ΔLin 7 dB	ΔLw 19 dB / ΔLin 7 dB	ΔLw 19 dB / ΔLin 7 dB
Reduction of in-room impact noise	NF S31-074	Class C (L _{n,ew} < 85 dB)	Class C (L _{n,ew} < 85 dB)	Class C (L _{n,ew} < 85 dB)	Class C (L _{n,ew} < 85 dB)
Thermal resistance	EN ISO 10456	0,05 m ² K/W	0,05 m ² K/W	0,05 m ² K/W	0,05 m ² K/W
Light fastness	EN ISO 26987 (method 3a)	≥ 6	≥ 6	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Very Good	Very Good	Very Good	Very Good
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30	R9 μ ≥ 0,30	R9/R10 Depending on embossing μ ≥ 0,30	R9/R10 Depending on embossing μ ≥ 0,30
Peeling resistance	EN ISO 24345	≥ 50N / 50mm	≥ 50N / 50mm	≥ 50N / 50mm	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C
ENVIRONMENTAL PERFORMANCES					
TVOC 28 days	ISO 16000-9	≤ 10µg/m ³	≤ 10µg/m ³	≤ 100µg/m ³	≤ 100µg/m ³
Recyclable		100%	100%	100%	100%
Plasticizer		Phthalate-free	Phthalate-free	Phthalate-free	Phthalate-free
WARRANTIES					
Commercial warranty		10 years	10 years	10 years	10 years
CE MARKING					
DoP number		0197-0052-DOP-2019-03	0197-0053-DOP-2019-03	0132-0070-DoP-2018-01	0132-0070-DoP-2018-01

*References available with industrial classification 42/43 are designed without acoustic backing. The above information is subject to modification for the benefit of further improvement. (07/19). According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



*TVOC AT 28 DAYS

Produced under license from IfP
<https://ifp-patents.com>



Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).



■ **WESTERN EUROPE:** Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ Belgium: Tarkett Belux N.V – Tel. +32 52 26 24 11 ■ Denmark: Tarkett A/S – Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy – Tel. +358 9 4257 9000 ■ France: Tarkett SAS – Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH – Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 6745 340 ■ Italy: Tarkett S.p.A. – Tel. +39 0744 7551 ■ Luxembourg: Tarkett Belux N.V – Tel. +32 52 26 24 11 ■ Netherlands: Tarkett BV – Tel. +31 416 685 491 ■ Norway: Tarkett AS – Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA – Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L – Tel. +34 91 358 00 35 ■ Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH – Tel. +41 043 233 79 24 ■ Turkey: Tarkett Aspen – Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ **EASTERN EUROPE, Baltic Countries:** Tarkett Baltics: Tel. +370 37 262 220 ■ **Czech Republic:** Tarkett org. složka – Tel. +420 271 001 600 ■ **Hungary:** Tarkett Polska SP Z.O.O. magyarországi fióktelepe – Tel. +421 2 48291 317 ■ **South East Europe:** Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 ■ **Ukraine:** Tarkett UA – Tel: +38 (0) 44 35 45 62 ■ **ASIA AND OCEANIA:** **Australia:** Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ **China:** Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 68 38 ext 841 ■ **North East Asia:** Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ **India:** Tarkett Flooring India Pvt. Ltd – Bangalore - Tel. +91 80 4130 3793 – New Delhi - Tel. +91 11 4352 4073 – Mumbai - Tel. +91 22 2648 8750 ■ **South East Asia:** Tarkett Flooring Singapore Pte. Ltd. – Tel: +65 6346 1585 ■ **AFRICA:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **MIDDLE EAST:** Tarkett Middle East: Tel. +961 1 51 3363/4 ■ **Israel:** Tarkett International: Tel. +33 1 41 20 41 01 ■ **NORTH AMERICA:** **USA:** Tarkett Inc. – Tel. +1 713 869 5811 ■ **Johnsonite:** Tel. +1 440 543 8916 ■ **Canada:** Tarkett Inc. – Tel. +1 450 293 173 ■ **LATIN AMERICA:** **Brazil:** Tarkett - Tel. 55 12 3954 7108 ■ **Argentina - Chile - Uruguay:** Tarkett Latam Mercosur - Tel. +54 11 47 08 07 72 / +54 911 44 46 88 82 ■ **Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago:** Tarkett - Tel. +55 11 9 8410 9310 / +55 11 9 5494 0069 ■ **Mexico/Central America:** Tarkett Latam Mexico - Tel. +55 11 9 8410 9310

The designs and photos used in this brochure are for illustration purposes only.
They are not contractual images and do not stand for product recommendation.
Design: Agence Gecko / Photos: Getty images - Studio des plantes / Print: Lamazière

www.professionals.tarkett.com



 **Tarkett**



■ WESTERN EUROPE: Austria: Tarkett Holding GmbH, Niederlassung Wien – Tel. +43 1 47 88 062 ■ Belgium: Tarkett Belux N.V. – Tel. +32 52 26 24 11 ■ Denmark: Tarkett A/S – Tel. +45 43 90 60 11 ■ Finland: Tarkett Oy – Tel. +358 9 4257 9000 ■ France: Tarkett SAS – Tel. +33 1 41 20 42 49 ■ Germany: Tarkett Holding GmbH – Tel. +49 62 33 810 ■ Greece: Tarkett Monoprosopi Ltd – Tel. +30 210 6745 540 ■ Italy: Tarkett S.p.A. – Tel. +39 0744 7551 ■ Luxembourg: Tarkett Belux N.V. – Tel. +32 52 26 24 11 ■ Netherlands: Tarkett BV – Tel. +31 41 685 491 ■ Norway: Tarkett AS – Tel. +47 32 20 92 00 ■ Portugal: Tarkett SA – Tel. +351 21 427 64 20 ■ Spain: Tarkett Floors S.L. – Tel. +34 91 358 00 35 ■ Sweden: Tarkett Sverige AB – Tel. +46 771 25 19 00 ■ Switzerland: Tarkett Holding GmbH – Tel. +41 043 233 79 24 ■ Turkey: Tarkett Aspen – Tel. +90 212 213 65 80 ■ United Kingdom: Tarkett Ltd – Tel. +44 (0) 1622 854 040 ■ EASTERN EUROPE: Baltic Countries: Tarkett Baltics: Tel. +370 37 262 220 ■ Czech Republic: Tarkett org. složka – Tel. +420 271 007 600 ■ Hungary: Tarkett Polska SP Z.O.O. magyarországi hivatala – Tel. +36 1 437 8150 ■ Poland: Tarkett Polska Sp. z o.o. – Tel. +48 22 16 09 231 ■ Russian Federation: ZAO Tarkett RUS – Tel. +7 495 775 5373 ■ Slovakia: Tarkett Polska, organizačná složka – Tel. +421 2 48291 317 ■ South East Europe: Tarkett SEE – Tel. +381 21 7557 649 (44) 569 12 21 ■ Ukraine: Tarkett UA – Tel. +38 (0) 44 35 45 621 ■ ASIA AND OCEANIA: Australia: Tarkett Australia Pty Ltd – Tel. +61 2 88 53 12 00 ■ China: Tarkett Floor Covering (Shanghai) Co. Ltd. – Tel. +86 (21) 60 95 63 88 ext 841 ■ North East Asia: Tarkett Hong Kong Limited – Tel. +852 2511 8716 ■ India: Tarkett Flooring India Pvt. Ltd. – Bangalore – Tel. +91 80 4130 3793 – New Delhi – Tel. +91 11 4352 4073 – Mumbai – Tel. +91 22 2648 8750 ■ South East Asia: Tarkett Flooring Singapore Pte. Ltd. – Tel. +65 6346 1585 ■ AFRICA: Tarkett International: Tel. +33 1 41 20 41 01 ■ MIDDLE EAST: Tarkett Middle East: Tel. +961 1 51 3363/4 ■ Israel: Tarkett International: Tel. +33 1 41 20 41 01 ■ NORTH AMERICA: USA: Tarkett Inc. – Tel. +1 713 869 5811 / Johnsonite – Tel. +1 440 543 8916 ■ Canada: Tarkett Inc. – Tel. +1 450 293 173 ■ LATIN AMERICA: Brazil: Tarkett - Tel. 55 12 3954 7108 ■ Argentina - Chile - Uruguay: Tarkett Latam Mercosur - Tel. +54 11 47 08 07 72 / +54 911 444688824 ■ Bolivia - Colombia - Ecuador - Panama - Paraguay - Peru - Trinidad and Tobago - Venezuela: Tarkett - Tel. +55 11 98410 9310/+55 11 95494 0069 ■ Mexico/Central America: Tarkett Latam Mexico - Tel. +55 11 98410 9310

07/2019 - 2600030022

LUXURY VINYL TILES

©Tarkett

iD Click Ultimate 55-70 & 55-70^{PLUS}

LUXURY VINYL TILES

Renovation
has never been
so swift, stylish
and robust



The designs and photos used in this brochure are for illustration purposes only.
They are not contractual images and do not stand for product recommendation.
Design: Agence Gecko / Photos: Getty images - Studio des plantes / Print: Lamazière

www.professionals.tarkett.com



 **Tarkett**

 **Tarkett**



TECHNICAL DATASHEET

CLASSIFICATION	Standards	iD Click Ultimate 70	iD Click Ultimate 55	iD Click Ultimate 70 ^{PLUS}	iD Click Ultimate 55 ^{PLUS}
Type of floor covering	EN ISO 10582	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering	Heterogeneous Compact Resilient Floorcovering
Classification	EN ISO 10874	23 - 34 - 43*	23 - 33 - 42*	23 - 34	23 - 33
TECHNICAL CHARACTERISTICS					
Total thickness	EN ISO 24346	6,50 mm	6,50 mm	6,50 mm	6,50 mm
Wear layer thickness	EN ISO 24340	0,70 mm	0,55 mm	0,70 mm	0,55 mm
Total weight	EN ISO 23997	11,30 kg/m ²	11,40 kg/m ²	11,30 kg/m ²	11,40 kg/m ²
Wear layer binder content	EN ISO 10582	Type I	Type I	Type I	Type I
Dimensions	EN ISO 24342 Planks	- 20,05 x 120,00 cm, 5 planks/box = 1,20 m ²	- 20,05 x 20,00 cm, 5 planks/box = 1,20 m ²	176 x 1213 cm, 6 planks/box = 1,28 m ²	176 x 1213 cm, 6 planks/box = 1,28 m ²
		24,30 x 150,00 cm, 3 planks/box = 1,09 m ²	24,30 x 150,00 cm, 3 planks/box = 1,09 m ²	-	-
	EN ISO 24342 Tiles	48,00 x 96,00 cm, 3 tiles/box = 1,38 m ²	48,00 x 96,00 cm, 3 tiles/box = 1,38 m ²	-	-
		48,00 x 48,00 cm, 5 tiles/box = 1,15 m ²	48,00 x 48,00 cm, 5 tiles/box = 1,15 m ²	-	-
		24,30 x 48,60 cm, 11 tiles/box = 1,30 m ²	24,30 x 48,60 cm, 11 tiles/box = 1,30 m ²	-	-
Surface treatment (PUR)		Yes - PUR Ultimate matte	Yes - PUR Ultimate matte	Yes - PUR Ultimate matte	Yes - PUR Ultimate matte
Beveled edges		Yes	Yes	Yes	Yes
Embossing in Register		No	No	Yes on PLUS references	Yes on PLUS references
TECHNICAL PERFORMANCES					
Dimensional stability	EN ISO 23999	Average measured value: 0,05% Required value: ≤ 0,15%	Average measured value: 0,05% Required value: ≤ 0,15%	Average measured value: 0,05% Required value: ≤ 0,15%	Average measured value: 0,05% Required value: ≤ 0,15%
Curl resultant to heat	EN ISO 23999	≤ 1 mm	≤ 1 mm	≤ 1 mm	≤ 1 mm
Reaction to fire	EN 13501-1	B _E -s1	B _E -s1	B _E -s1	B _E -s1
Residual indentation	EN ISO 24343-1	Average measured value: 0,02 mm Required value: ≤ 0,10 mm	Average measured value: 0,02 mm Required value: ≤ 0,10 mm	Average measured value: 0,02 mm Required value: ≤ 0,10 mm	Average measured value: 0,02 mm Required value: ≤ 0,10 mm
Furniture leg	EN 424	No damage	No damage	No damage	No damage
Castor chair	ISO 4918 - EN 425	No damage	No damage	No damage	No damage
Impact sound reduction	NF EN ISO 717 / 2	ΔLw 19 dB / ΔLin 7 dB	ΔLw 19 dB / ΔLin 7 dB	ΔLw 19 dB / ΔLin 7 dB	ΔLw 19 dB / ΔLin 7 dB
Reduction of in-room impact noise	NFS31-074	Class C (L _{n,ew} < 85 dB)	Class C (L _{n,ew} < 85 dB)	Class C (L _{n,ew} < 85 dB)	Class C (L _{n,ew} < 85 dB)
Thermal resistance	EN ISO 10456	0,05 m ² K/W	0,05 m ² K/W	0,05 m ² K/W	0,05 m ² K/W
Light fastness	EN ISO 105-B02 (method 3a)	≥ 6	≥ 6	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Very Good	Very Good	Very Good	Very Good
Slip resistance	DIN 51130 EN 13893	R9 μ ≥ 0,30	R9 μ ≥ 0,30	R9/R10 Depending on embossing μ ≥ 0,30	R9/R10 Depending on embossing μ ≥ 0,30
Peeling resistance	EN ISO 24345	≥ 50N / 50mm	≥ 50N / 50mm	≥ 50N / 50mm	≥ 50N / 50mm
Underfloor heating		Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C	Suitable - max. 27 °C
ENVIRONMENTAL PERFORMANCES					
TVOC 28 days	ISO 16000-9	≤ 10 µg/m ³	≤ 10 µg/m ³	≤ 100 µg/m ³	≤ 100 µg/m ³
Recyclable		100%	100%	100%	100%
Plasticizer		Phthalate-free	Phthalate-free	Phthalate-free	Phthalate-free
WARRANTIES					
Commercial warranty		10 years	10 years	10 years	10 years
CE MARKING					
DoP number		0197-0052-DOP-2019-03	0197-0053-DOP-2019-03	0132-0070-DoP-2018-01	0132-0070-DoP-2018-01

*References available with industrial classification 42/43 are designed without acoustic backing. The above information is subject to modification for the benefit of further improvement. (07/19). According to the European Regulation N° 305/2011 for CE Marking, the Declarations of Performance are available on our website www.tarkett.com. Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.



Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions).

CUSTOMS ARREF : 4820500000

LOFT
LIGHT / MEDIUM / DARK

24742 016 / 24742 014 / 24742 015